

GS120 SURFACE MOUNT REMOTE E-STOP SWITCH

Description:

Yellow non-metallic NEMA 4X enclosure.
 Accepts one to three contact blocks.
 Labelled EMERGENCY GENERATOR STOP and PUSH BUTTON.
 Red operator is labelled PULL TO RESET.

Electrical Characteristics:


Contact blocks (Normally Closed P/N PILNCCB)
 Screw and captive clamp terminals.
 Min: 1 X 24 AWG Max: 2 X 16 AWG
 600 Vac @ 1.2 Amp
 250 Vdc at 0.27Amp
 120 Vdc @ 0.55 Amp



GS120

Specification:

PUSH BUTTON EMERGENCY GENERATOR STOP P/N GS120 uses a single push button operating mode. Using a maintained (push-pull) red 40mm mushroom operator hot stamped PULL TO RESET on the mushroom face. The operating mode reverses the nominal state of the installed contact blocks such that type contact blocks remain open/closed when the operator is pressed or pulled to reset.

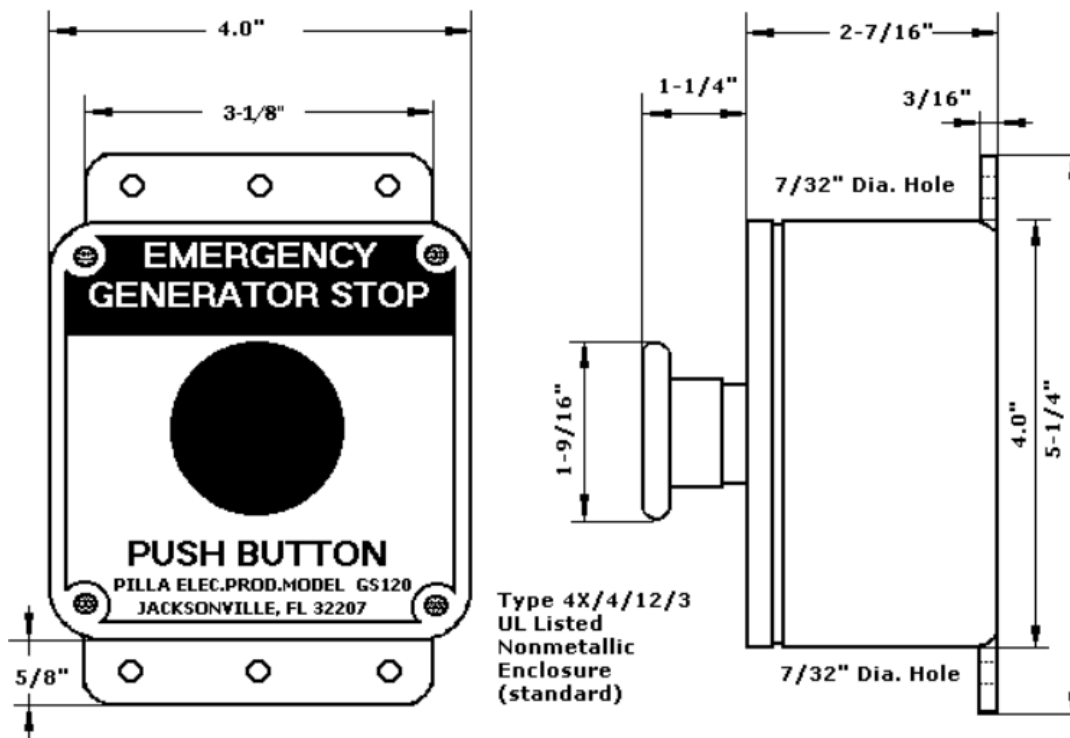

Type 4X/4/12/3
 UL Listed
 Nonmetallic
 Enclosure
 (standard)

PILLA MODEL GS120 (Generator Stop) PUSH BUTTON STATION