


# TJUD125P

## Industrial Diesel Generator Sets

EPA Certified Tier 3 for Stationary Emergency Applications

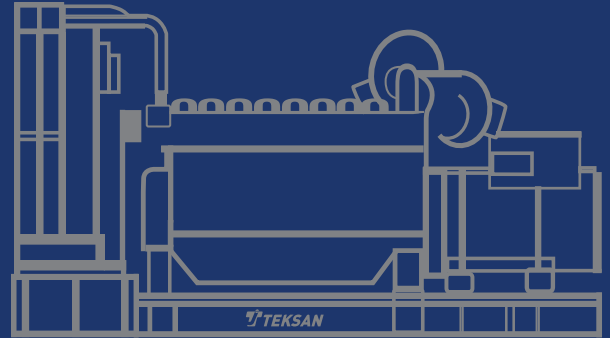

### Genset Standby Power Rating

#### 125/40 °C Standby Ratings

Alternator Model			TAL044M	TAL044J	TAL044E	LSA44.3 VL14	LSA44.3 L10	LSA44.3 M6
Voltage	Phase	Pf	kW / A	kW / A	kW / A	kW / A	kW / A	kW / A
480/277V $\Delta$	3	0,8	150 / 225	150 / 225	125 / 188	150 / 225	150 / 225	125 / 188
208/120V $\Delta$	3	0,8	150 / 520	130 / 451	108 / 375	150 / 520	130 / 451	108 / 375
240/120V $\Delta$	3	0,8	150 / 451	130 / 391	108 / 325	150 / 451	130 / 391	108 / 325
240/120V $\Delta\Delta$	1	1	125 / 521			125 / 521		
Alternator Model			TAL044E			LSA44.3 M6		
600/347V $\Delta$	3	0,8	125 / 150			125 / 150		

#### Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100%. The generator must not be overloaded.

#### Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

#### Standby Power

The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

### Certifications & Standards

The Generator set is designed and manufactured in a facility certified to **ISO9001:2015, ISO14001:2015, ISO45001-2018** and **ISO10002:2014 standards**.

Generator set is **UL2200**, cUL listed and meets ISO 8528-5

The generator set, with its components, are **prototype tested**, factory-built and production tested per UL standards.

The generator set meets **NFPA110 Level 1** when equipped with the necessary accessories and installed per NFPA standards.

# TJUD125P

## Industrial Diesel Generator Sets



### Standard Features – Engine

EPA Certified Tier 3 – Emergency Stationary Only

Unit Mounted Radiator

Oil and Coolant Drain Extension w/Valve

Fuel – Water Separator Filter

Speed Control to ISO 8528, G2

12V Battery System & Cables

Flex Fuel Connectors

Flex Exhaust Connection

### Application Data – Engine

Manufacturer	Perkins
Model	1106D-E70TAG2
Cubic Capacity	7.01 liters
Bore x Stroke	105 mm x 135 mm
Compression Ratio	16.8:1
Aspiration	Turbocharged and air charge cooled
Gross Engine Power	171 kW
Net Engine Power	161 kW
BMEP	1626.2 kPa
Speed Variation at Constant Load	±0.18%
Governor Type	Control by ECM
Battery Charging Alternator	12V, 65A
Battery Qty, CCA Rating	1 × 102Ah, 860A
Ambient Capacity of Radiator	122 °F (50 °C)
Total Coolant Capacity	20.5 liters
Thermostat Operating Range	82 °C to 95 °C
Combustion Air Flow	14.4 m <sup>3</sup> /min
Exhaust Gas Temp	450 °C
Max Allowable Back Pressure	15 kPa
Total lubricating capacity	17.5 liters

### Fuel Consumption

Standby Power (110% of Prime)	11.4 g/h (43.1 l/h)
Prime Power (100%)	10.5 g/h (39.7 l/h)
At 75% of Prime	8.5 g/h (32.1 l/h)
At 50% of Prime	5.9 g/h (22.2 l/h)

# TJUD125P

## Industrial Diesel Generator Sets



### Standard Features – Alternator

Brushless Single Bearing	AREP+ Excitation
Class H Insulation	Digital Automatic Voltage Regulator
Low reactance 2/3 pitch windings	100% of Rated Load – One Step
IEC 60034, NEMA MG 1.32-33, ISO8528-3	CSA C22.2 n°100-14, UL 1446 Compliant

### Application Data – Alternator

Manufacturer	Leroy Somer
Type	4 Poles, Brushless
Bearing	Single
Protection	IP 23
AVR	D350
Voltage Regulation (**)	± 0.25%
AREP+/PMG Short Circuit Current	TAL:2.7 IN: 10 s / LSA:300% (3 IN): 10 s (*)
One Step Load Acceptance	100% of rated load
Altitude	≤1000 meters
Over Speed	2250 rpm
THD (***) in no-load	< 2%
THD (***) on linear load	< 5%
Waveform: NEMA = TIF (***)	< 50
Waveform: I.E.C. = FHT (***)	< 2%

(\*) D350: 10 seconds (\*\*) Steady state (\*\*\*) Total harmonic distortion between phases, no-load or on-load (non-distorting)

### Motor starting (AREP+) Locked rotor kVA at P.F. = 0.6, 480V – 60Hz

Alternator Model	TAL044M	TAL044J	TAL044E	LSA44.3 VL14	LSA 44.3 L10	LSA 44.3 M6
%30 Voltage Drop	650kVA	430kVA	400kVA	700kVA	550kVA	440kVA

(-)For a starting P.F. other than 0.6, the starting kVA must be multiplied by  $K = \text{Sine P.F.} / 0.8$

(-)For voltages other than 400V (Y), 230V (Δ) at 50 Hz, then kVA must be multiplied by  $(400/U)^2$  or  $(230/U)^2$ .

### Application Data – Circuit Breaker

Genset Voltage	480/277V ↘	208/120V ↘	240/120V ↘	240/120V △△	600/347V ↘
ABB Breaker Model	XT4N250-225A	XT5N600-600A	XT5N400-400A	XT5N600-600A	XT4N250-150A

# TJUD125P

## Industrial Diesel Generator Sets



### Control Panel

Manufacturer	DSE - Deep Sea Electronics
Model	7310 MKII
DC Supply	8 to 35V Continuous
Generator Voltage Range (Ph-Ph)	26V to 719V AC
Generator Frequency Range	3,5Hz to 75Hz
Standards	BS EN 61000-6-2, BS EN 61000-6-4, BS EN 60950, BS EN 60529 BS EN 60068-2-1, BS EN 60068-2-2 BS EN 60068-2-6, BS EN 60068-2-30 BS EN 60068-2-78, BS EN 60068-2-27



### Key Features

- License free PC software
- 4-Line back-lit LCD text display
- Five key menu navigation
- LCD Alarm Indication
- DSENet expansion compatibility
- Internal PLC editor
- Protection disable feature
- Data logging facility
- Fully configurable via PC
- Front panel configuration
- Power safe mode
- 6 configurable DC outputs
- 2 configurable volt free relay outputs
- 6 configurable analogue/digital inputs
- 8 configurable digital inputs
- Configurable 5 stage dummy load and load shedding outputs
- Backed up real time clock
- Fuel usage monitor and low fuel level alarms
- Remote SCADA monitoring via DSE Configuration Suite PC Software
- Advanced SMS messaging (additional external model required)
- Start & Stop capability via SMS messaging
- Configurable event log (250)
- Multiple date and time scheduler

### Protections

- ✓ Gen. Voltage - under / over
- ✓ Gen. Freq. - under / over
- ✓ Engine Speed - under / over
- ✓ Engine Oil Pressure - low
- ✓ Engine Temp - low / high
- ✓ Battery Voltage - low / high
- ✓ Weak Battery
- ✓ Fail to Start / Stop
- ✓ Charge Alternator Fail
- ✓ Over Current & Load (kW/kVAR)
- ✓ Unbalanced Load
- ✓ Independent Earth Fault
- ✓ Reverse Power
- ✓ Loss of Speed Signal

### Instruments

- ✓ Gen. Voltage (L-L/L-N)
- ✓ Gen. Frequency
- ✓ Engine speed
- ✓ Oil Pressure
- ✓ Water Temperature
- ✓ Battery Voltage
- ✓ Run Time
- ✓ Phase Sequence
- ✓ Power monitoring (kWh/kVAh/kVArh)
- ✓ Power (kWh/kVAh/kVArh)
- ✓ Power Factor
- ✓ Generator Current
- ✓ Generator Load (%)
- ✓ Earth Current



# TJUD125P

## Industrial Diesel Generator Sets



### Standard Features – General

UL 2200 & cUL Listed	NFPA-110, Level 1 Compliant (*)
Main Line Circuit Breaker Mounted & Wired	Jacket Water Heater w/Isolation Valves
Vibration Isolation Mounts	Battery Charger & Starter Battery
Aluminized Steel Silencer	2 Year / 2000 Hours Standby Warranty

### Battery Charger

DSE Model	9470 MKII
Operation Voltage (L-N)	90V to 305V
Output Volts/Current	12V / 5A


### Jacket Water Heater

Hotstart Model	TPS181GT10-000
Operation Voltage	120V
Power	1800W

### Dimensions, Weights & Sound Levels

#### Open Set

Fuel Tank Capacity	Run Time (hr)	L in(mm)	W in(mm)	H in(mm)	Weight lbs(kg)
No Tank	-	98.4" (2500)	44.1" (1120)	57" (1450)	2,975 (1,350)
300gal	24	116" (2950)	44.1" (1120)	85" (2160)	4,960 (2,250)
585gal	48	TBA	TBA	TBA	TBA
875gal	72	TBA	TBA	TBA	TBA

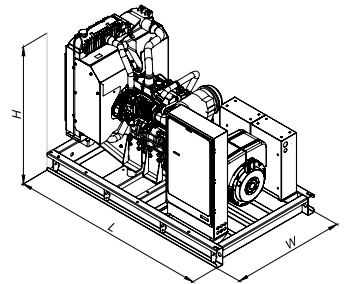

#### Sound Attenuated Enclosure Level 2

Fuel Tank Capacity	Run Time (hr)	L in(mm)	W in(mm)	H in(mm)	Weight lbs(kg)		Sound Level dBA(**)
					Steel	Aluminum	
No Tank	-	144.3" (3665)	46.4" (1180)	74.4" (1890)	4,410 (2,000)	3,660 (1,660)	TBA
300gal	24	173.6" (4410)	46.4" (1180)	93.3" (2370)	6,415 (2,910)	5,665 (2,570)	
585gal	48	TBA	TBA	TBA	TBA	TBA	
875gal	72	TBA	TBA	TBA	TBA	TBA	

#### Sound Attenuated Enclosure Level 3

Fuel Tank Capacity	Run Time (hr)	L in(mm)	W in(mm)	H in(mm)	Weight lbs(kg)		Sound Level dBA(**)
					Steel	Aluminum	
No Tank	-	TBA	TBA	TBA	TBA	TBA	TBA
300gal	24	TBA	TBA	TBA	TBA	TBA	
585gal	48	TBA	TBA	TBA	TBA	TBA	
875gal	72	TBA	TBA	TBA	TBA	TBA	

(\*)Generator set meets NFPA-110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.

(\*\*)Sound data as measured at 23 feet (7 meters) in accordance with ISO 8528-10 at stand-by power rating

- All measurements are approximate and for estimation purposes only. Specification characteristics may change without notice. Please contact Teksan for detailed installation drawings

# TJUD125P

## Industrial Diesel Generator Sets



### Available Options

#### Circuit Brakers

- Magnetic Trip
- Thermal Magnetic Trip
- Electronic Trip LS/I
- Electronic Trip LSI
- Electronic Trip LSIg
- 80% Rating
- 100% Rating
- Electrically Operated CB (paralleling)
- Shunt Trip – wired to controller
- Auxiliary Contact – volt free contact

#### Alternator

- Upsize Alternator
- Space Heater
- RTD Sensors

#### Electrical

- GFCI Receptacle Outlet
- Load Center
- Power Outlet (14–50R, 120/240V, 50A)
- Power Outlet (TT30R, 120V, 30A)
- Power Outlet Panel (120/240V, 80A) NEMA5–20R, NEMA14–50R, TT-30R
- Surge Protector

#### Control System

- Remote Annunciator Panel – 8 lights
- Remote Annunciator Panel – 16 lights
- Remote Annunciator Panel – 24 lights
- Common Alarm Relay – V free contact
- Generator Run Relay – V free contact
- Control Panel Heater
- Dry Contacts Expansion Relay
- Remote E-Stop Switch
- Remote E-Stop Switch – Break Glass
- Remote Monitoring (DSE892 SNMP)
- Remote Monitoring (DSE890 Webnet)
- Paralleling System Upgrade
- Manual Voltage Adjust
- Manual Speed Adjust

#### Miscellaneous

- ATS Panel
- Rated Power Factor Factory Testing
- Enclosure Heater
- Oil Pan Heater
- Spring Isolators
- Crankcase Ventilation Filter
- Critical Silencer Set w/Open Skid Unit

#### Enclosures

- Sound Attenuated Level 2
- Sound Attenuated Level 3
- Enclosure DC light w/timer
- Enclosure AC light
- Enclosure Space Heater
- Motorized Air Inlet Damper
- Gravity Radiator Louver

#### Fuel Tank

- UL142 Listed
- UL2085 Listed
- Fuel Level Display on Controller
- Fuel / Water Separator

#### Battery System

- Starting Batteries
- Battery Charger (NFPA110 Compliant)
- Battery Wrap Heater
- Battery Restraint
- Battery Disconnect Switch

#### Warranty

- 5 Years Extended Limited Warranty

DISTRIBUTED BY:

